



CPX 1180P is an 18 x 5 watts outdoor Ultraviolet LED Par. It is a bright waterproof UV LED Par, ideal for black light applications in stages, events and outdoor applications.

SOURCE Light source: 18 x 5 watts UV LEDs
LED life expectancy: 50,000 Hrs.

OPTICAL SYSTEM Beam angle: 25°
Light output: 7,000 Lux @ 2m @ 10°

DYNAMIC EFFECTS Color: Ultraviolet
Strobe and fade effect
Built-in dynamic macros


CONTROL & PROGRAMMING Control protocols: DMX, Master-Slave, Auto Run
Display: TFT displayer with 4 buttons
Control channels: 1, 2, 5 CHs

ELECTRICAL Input voltage: 100-240 V/50-60Hz
Power consumption: 95 watts

CONNECTIONS DMX connections: IP DMX in/out cables with 3 pin screw lock connectors
Power connections: IP power in/out cable, 3 pin screw lock connectors

PHYSICAL Dimensions: 280.32 x 142.56 x 288.28mm
Net weight: 5 Kg
Color: Black
Housing: Aluminum
IP rating: 65
Operating temperature: -20°C/45°C

Dimensions

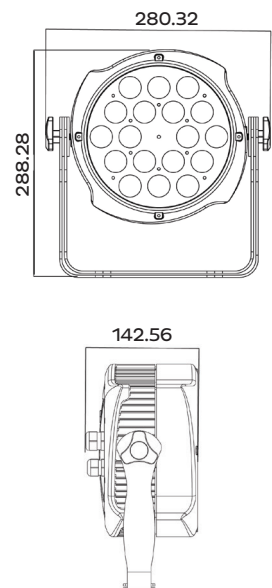

Luminous Diagram

